


Dimensional drawing:

Tower-enclosur

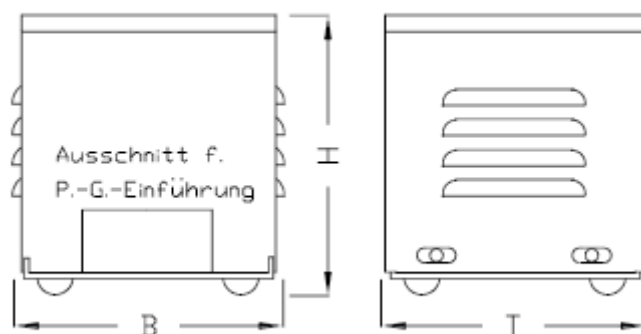

Steel sheet metal enclosure: Protection class IP23
(partially also available in IP44 without air vents)

for the installation of small transformers
with fixed PG insertion plate
Material: St.1203 , plastic-coated RAL7035

dimension:

Tower-enclosure

Typ B+S	B	T	H	kg approx.
W00	98	73	65	0,3
W 0	123	98	95	0,5
W I	143	113	118	0,8
W II	183	183	158	1,5
W III	183	183	200	1,7
W IV	253	223	200	2,8
W IVA	313	213	200	3,2

Dimensions are approximate and in mm subject to alteration

PG cable glands, installation components such as fuses, motor protection circuit breakers, indicator and control elements can be additionally installed by us at any time. Special paint finishes or enclosures with higher degrees of protection (up to IP55) are also available at an additional cost.

Quality is our highest priority, which is why we have been certified according to DIN EN ISO 9001 since 1994.



BEI TRANSFORMATOREN DROSSELN STROMVERSORGUNGEN IMMER BÜRKLE+SCHÖCK-PRODUKTE

TELEFON 0711/7837-100




TELEFAX 0711/7837-129

Large-enclosure




**+ BÜRKLE
SCHÖCK**


Dimensional drawing:



Base enclosure with fixed side panels for the installation of additional parts (such as PG, motor protection switches etc.)



Lid

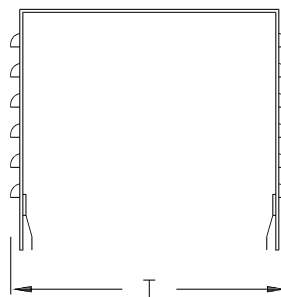

Steel sheet metal enclosure: Protection class IP23
(Also available in IP44 without air vents)

for the installation of medium and larger transformers with fixed side panels for the installation of additional parts, such as PG fittings and motor protection switches.
Available as a Tower-enclosure or Wall-enclosure
Material: St.1203 plastic-coated RAL7035

dimension:

Wall-enclosure

Typ B+S	B	T	H	kg approx.
H12	205	155	170	1,6
H13	305	225	205	3,2
H14	385	305	235	5,2
H15	505	355	290	8,5

Tower-enclosure

Typ B+S	B	T	H	kg approx.
H25	305	225	230	4,0
H26	365	255	310	6,4
H27	405	285	290*	7,0
H28	485	385	310*	9,8
H29	565	385	310*	11,3
H30	605	355	555*	15,0

Dimensions are approximate and in mm subject to alteration
* The height can increase by up to 45mm!

The Tower-enclosure is equipped with rubber feet; the Wall-enclosure can be supplied with wall-mounting brackets. Additionally, the floor-standing enclosures can also be supplied with castors. Please specify this when placing the order.

PG cable glands, installation components such as fuses, motor protection circuit breakers, indicator and control elements can be additionally installed by us at any time. Special paint finishes or enclosures with higher degrees of protection (up to IP55) are also available at an additional cost.

Quality is our highest priority, which is why we have been certified according to DIN EN ISO 9001 since 1994.



BEI TRANSFORMATOREN DROSSELN STROMVERSORGUNGEN IMMER BÜRKLE+SCHÖCK-PRODUKTE

TELEFON 0711/7837-100



TELEFAX 0711/7837-129