




Dimension Sheet: L2

for series U*



**BÜRKLE
SCHÖCK**

Single-phase transformer UI-Cut horizontal mounting

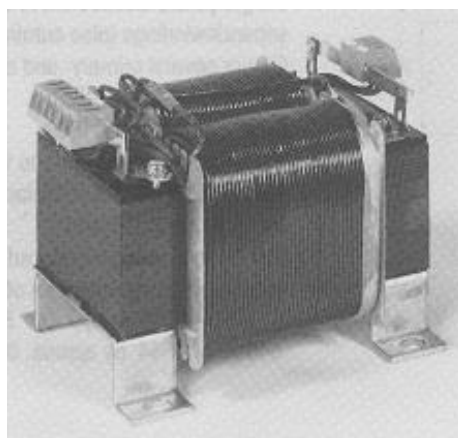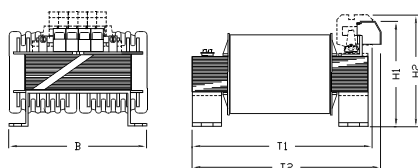

Single-phase transformers with separate windings (also autotransformers). One or several primary- and secondary voltages. Degree of protection IP00. The transformers conform to the VDE regulations, the IEC standard and conform to CE, too. The nominal rating is reduced, when installed in an enclosure as of IP23 - IP32 by approx. 5-20% and as of IP44 by approx. 30-50%

dimension:

Type Bürkle+Schöck	B	T2	H2	L1	L3	d	Weight approx. in kg	enclosure
U* 2021	82	130	60	43	80	3,5	1,6	WI
U* 2031	82	130	70	43	80	3,5	2,0	WI
U* 2526	100	158	73	60	100	3,5	2,7	WII
U* 2541	100	158	87	60	100	3,5	3,5	WII
U* 3030	120	170	121	102	120	5,8	4,7	WIV
U* 3041	120	170	133	102	120	5,8	5,6	WIV
U* 3051	120	170	146	102	120	5,8	7,0	WIV
U* 3537	144	195	131	126	140	5,8	8,9	WIV
U* 3545	144	195	138	126	140	5,8	10,2	WIV
U* 3555	144	195	148	126	140	5,8	12,1	WIV
U* 3840	152	210	133	126	152	5,8	9,0	WIV
U* 3864	152	210	157	126	152	5,8	14,0	WIV
U* 4041	160	220	138	146	160	7,0	9,0	WIV
U* 4051	160	220	148	146	160	7,0	11,5	WIV
U* 4061	160	220	158	146	160	7,0	14,0	WIV
U* 4070	160	220	167	146	160	7,0	16,0	H25
U* 4075	160	220	172	146	160	7,0	18,5	H25
U* 4446	176	240	143	146	176	7,0	16,0	H25
U* 4460	176	240	157	146	176	7,0	18,0	H25
U* 4472	176	240	169	146	176	7,0	20,0	H25
U* 5036	200	270	136	174	200	7,0	14,0	H26
U* 5044	200	270	144	174	200	7,0	16,0	H26
U* 5052	200	270	152	174	200	7,0	17,5	H26
U* 5065	200	270	165	174	200	7,0	19,8	H26
U* 5077	200	270	177	174	200	7,0	22,0	H26
U* 5092	200	270	192	174	200	7,0	27,5	H26
U* 50103	200	270	203	174	200	7,0	32,5	H26

Maße sind ca. Maße in mm
Änderungen vorbehalten

Dimensions are approximate and in mm
subject to alterations

dimensions approximatives en mm
sous réserve de modifications

U = UI-Cut

* = 2. letter, which defines the lamination quality and thus the core performance.

D-70565 STUTTGART BÜRKLE + SCHÖCK GEWERBESTRAßE 38

TELEFON 0711/7837-100



TELEFAX 0711/7837-129


Dimension Sheet: L2

for series U*



**+ BÜRKLE
SCHÖCK**

Single-phase transformer UI-Cut horizontal mounting

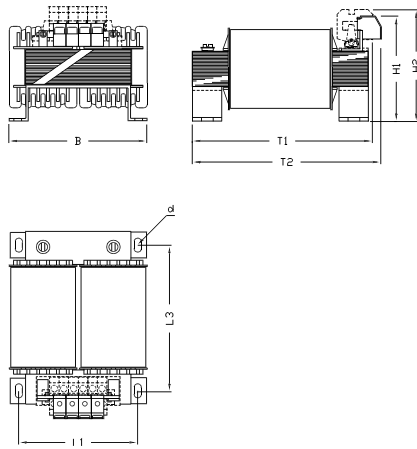

Einphasen-Transformator mit getrennten Wicklungen (auch Spartransformatoren), mit einer oder mit mehreren Primär- und Sekundärspannungen
Schutzart IP00.

Die Transformatoren entsprechen den VDE- Vorschriften, der IEC-Norm CE-konform

Die Nennleistung verringert sich beim Einbau in ein Gehäuse:

ab IP23 - IP32 um ca. 5-20%
ab IP44 um ca. 30-50%

Transformateur monophasé avec bobinages séparés (autotransformateur également). Une ou plusieurs tensions primaire et secondaire.

Classe de protection IP00.

Les transformateurs sont conformes aux prescriptions VDE, aux normes IEC et aux CE.

La puissance nominale se réduit si montage d' un boîtier à partir de

IP23 - IP32 de 5-20% env.
de IP44 de 30-50% env.

dimension:

Type Bürkle+Schöck	B	T2	H2	L1	L3	d	Weight approx. in kg	enclosure
U* 5658	224	300	160	192	224	7,0	29,0	H27
U* 5692	224	300	194	192	224	7,0	42,5	H27
U* 6045	240	320	153	204	240	9,0	23,0	H28
U* 6054	240	320	162	204	240	9,0	27,0	H28
U* 6063	240	320	171	204	240	9,0	32,0	H28
U* 6078	240	320	186	204	240	9,0	41,0	H28
U* 6093	240	320	201	204	240	9,0	46,0	H28
U* 7044	280	370	156	234	280	9,0	41,0	H29/30
U* 7053	280	370	165	234	280	9,0	44,0	H29/30
U* 7063	280	370	175	234	280	9,0	48,0	H29/30
U* 7073	280	370	185	234	280	9,0	52,0	H29/30
U* 7088	280	370	200	234	280	9,0	57,5	H29/30
U* 70103	280	370	215	234	280	9,0	63,0	H29/30
U* 70133	280	370	245	234	280	9,0	88,0	H29/30
U* 8061	320	420	182	264	320	12,0	75,0	H30
U* 8072	320	420	193	264	320	12,0	80,0	H30
U* 8083	320	420	204	264	320	12,0	90,0	H30
U* 8095	320	420	216	264	320	12,0	101,0	H30
U* 80110	320	420	239	264	320	12,0	135,0	H30
U* 80125	320	420	246	264	320	12,0	146,0	H30
U* 80140	320	420	261	264	320	12,0	155,0	H30
U* 80160	320	420	281	264	320	12,0	170,0	H30
U* 80180	320	420	301	264	320	12,0	185,0	H110

Maße sind ca. Maße in mm
Änderungen vorbehalten

Dimensions are approximate and in mm
subject to alterations

dimensions approximatives en mm
sous réserve de modifications

U = UI-Cut

*= 2. letter, which defines the lamination quality and thus the core performance.

D-70565 STUTTGART BÜRKLE + SCHÖCK GEWERBESTRAßE 38

TELEFON 0711/7837-100



TELEFAX 0711/7837-129