

Dimension Sheet: US





**+ BÜRKLE
SCHÖCK**

Single-phase transformer

Coil cage

Vertical mounting

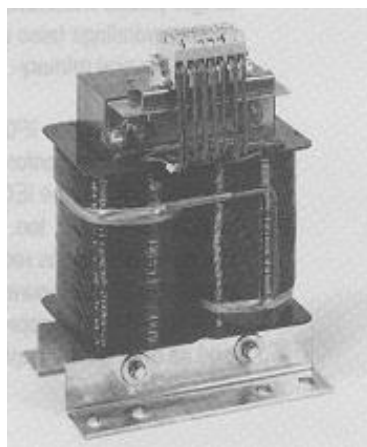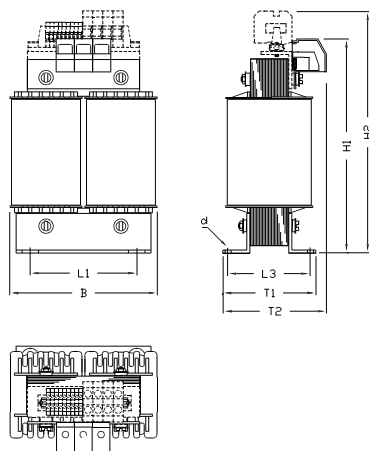

Single-phase transformers with separate windings (also autotransformers). One or several primary- and secondary voltages. Degree of protection IP00. The transformers conform to the VDE regulations, the IEC standard and conform to CE, too. The nominal rating is reduced, when installed in an enclosure as of
IP23 - IP32 by approx. 5-20%
and as of IP44 by approx. 30-50%

dimension:

Type Bürkle+Schöck	B	T2	H1	H2	L1	L3	d	Weight aprox. in kg	enclosure
US* 6063	240	200	310	410	200	125	11,0	32,0	H30
US* 6078	240	215	310	410	200	141	11,0	41,0	H30
US* 6093	240	230	310	410	200	156	11,0	46,0	H30
US* 7073	280	240	360	460	240	152	11,0	52,0	H30
US* 7088	280	255	360	460	240	167	11,0	57,5	H30
US* 70103	280	270	360	460	240	182	11,0	63,0	H30
US* 70133	280	300	360	460	240	211	11,0	88,0	H30
US* 8083	320	265	410	510	270	184	13,0	90,0	H30 / H150
US* 80110	320	295	410	510	270	211	13,0	135,0	H30 / H150
US* 80125	320	310	410	510	270	226	13,0	146,0	H30 / H150
US* 80140	320	325	410	510	270	241	13,0	155,0	H30 / H150
US* 80165	320	345	410	510	270	261	13,0	180,0	H30 / H150
US* 80180	320	365	410	510	270	281	13,0	202,0	H30 / H150

Maße sind ca. Maße in mm
Änderungen vorbehalten

Dimensions are approximate and in mm
subject to alterations

dimensions approximatives en mm
sous réserve de modifications

US = UI-Cut with coil cage

* = 3. letter, which defines the lamination quality and thus the core performance.

D-70565 STUTTGART BÜRKLE + SCHÖCK GEWERBESTRAßE 38

TELEFON 0711/7837-100



TELEFAX 0711/7837-129