


Dimensional drawing:

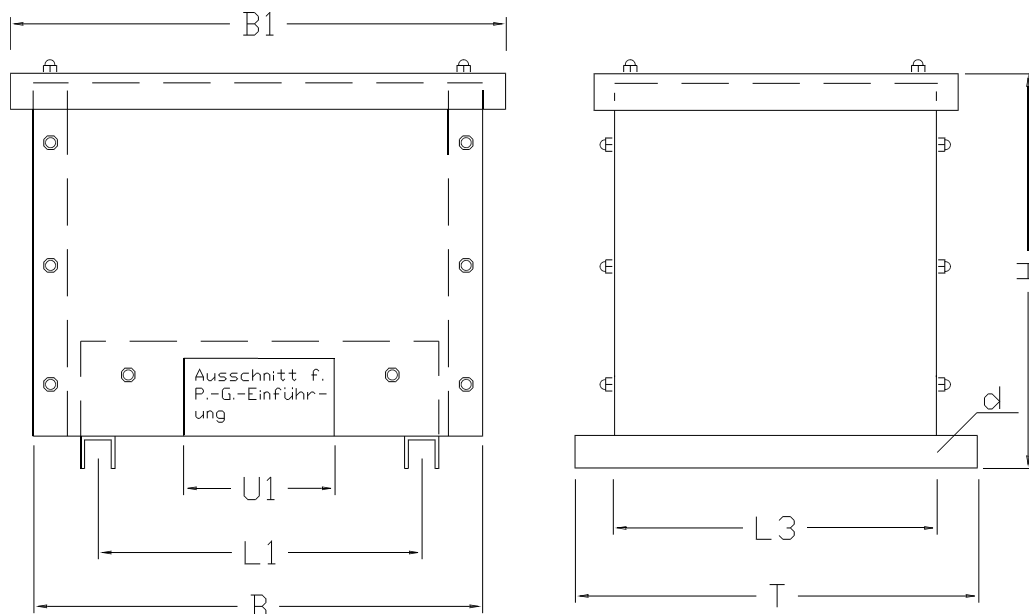

Steel sheet metal enclosure:

Protection class selectable from IP21 to IP43

For the installation of large transformers

With removable side panels for easier maintenance

Fixed side support for the installation of PG screw connections

Material: St.1203, plastic-coated RAL7035

dimension:

Typ B+S	B1	B	T	H	L1*	L3	U1	d	kg approx.
H110	525	465	505	540	289 - 137	460	250x125	11x15	23,0
H120	585	525	555	620	349 - 197	510	250x125	11x15	28,0
H130	585	525	445	480	349 - 197	400	250x125	11x15	20,0
H140	605	585	505	540	409 - 257	460	250x125	11x15	26,0
H150	745	685	555	620	509 - 357	510	250x125	11x15	32,0
H160	830	765	635	700	616 - 332	590	250x125	11x15	44,0
H170	1030	970	770	770	812 - 428	720	250x125	11x15	60,0
H180	1130	1070	870	880	891 - 407	820	250x125	11x15	77,0
H190	1320	1260	870	1330	1081 - 497	820	250x125	11x15	116,0

L1* = depending on the installed transformer

Dimensions are approximate and in mm subject to alteration

The enclosures can also be supplied mobile on castors and with additional ventilation by means of fans.

PG cable glands and installed components such as fuse elements, motor protection circuit breakers, indicator and control elements can also be additionally installed by us.

Special paint finishes or enclosures with higher degrees of protection (up to IP55) are also available at an additional cost.

Quality is our highest priority, which is why we have been certified according to DIN EN ISO 9001 since 1994.



BEI TRANSFORMATOREN DROSSELN STROMVERSORGUNGEN IMMER BÜRKLE+SCHÖCK-PRODUKTE

TELEFON 0711/7837-100




TELEFAX 0711/7837-129

IP54- enclosure



**+ BÜRKLE
SCHÖCK**

Dimensional drawing:

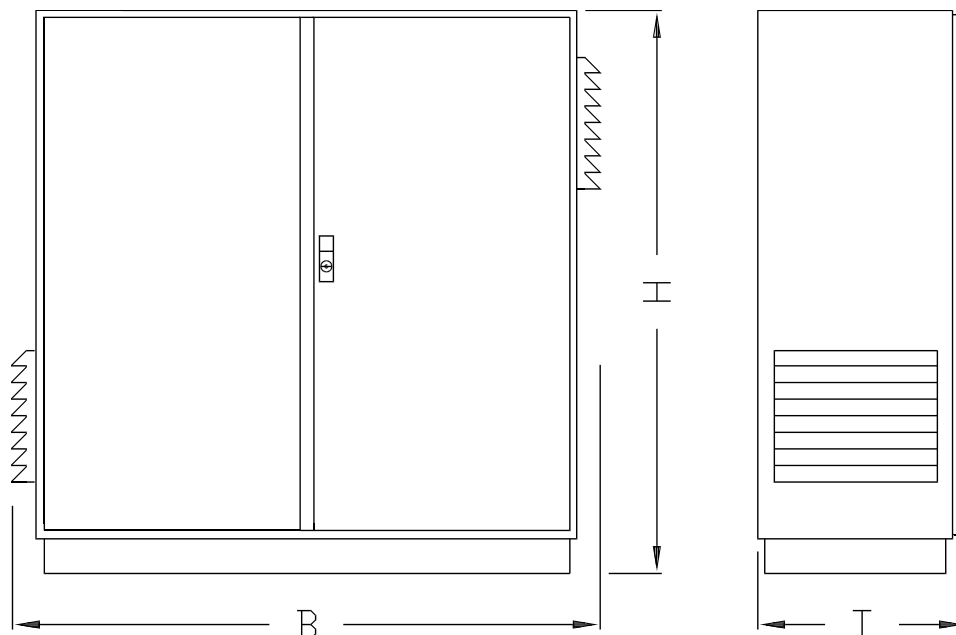

Standard Rittal enclosure protection class IP54

for the installation of transformers
with additional filter ventilation

Door with double-bit lock

Loss heat dissipation optimized with computer

Steel sheet, dip-primed, powder-coated RAL7035 textured finish

dimension:

Typ B+S	B*	T	H	kg* ca.
AX1033	300	210	300	6,70
AX1031	380	210	300	8,18
AX1380	380	210	380	9,48
AX1338	380	350	600	18,55
AX1045	400	210	500	12,14
AX1350	500	300	500	19,00
AX1339	600	350	380	18,75
AX1060	600	210	600	22,3
AX1376	600	350	760	34,0

* When using filter fans, dimension B increases by approximately 30 mm.
The weight increases by approximately 2 kg per fan.

Typ B+S	B*	T	H	kg* ca.
AX1260	600	300	1200	50,0
AX1073	760	300	760	40,5
AX1180	800	300	1000	52,0
AX1280	800	300	1200	63,5
AX1130	1000	300	760	52,0
AX1110	1000	300	1000	65,0
AX1213	1000	300	1200	73,8
AX1114	1000	300	1400	88,5
AX1360	600	350	600	26,34

Dimensions are approximate and in mm subject to alteration

PG cable glands and installed components such as fuse elements, motor protection circuit breakers, indicator and control elements can be additionally installed by us.

Special paint finishes are also available at an additional cost.

Quality is our highest priority, which is why we have been certified according to DIN EN ISO 9001 since 1994.



BEI TRANSFORMATOREN DROSSELN STROMVERSORGUNGEN IMMER BÜRKLE+SCHÖCK-PRODUKTE

TELEFON 0711/7837-100



TELEFAX 0711/7837-129